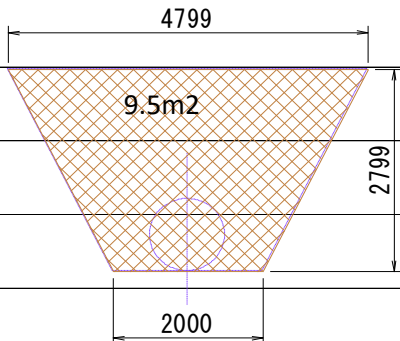
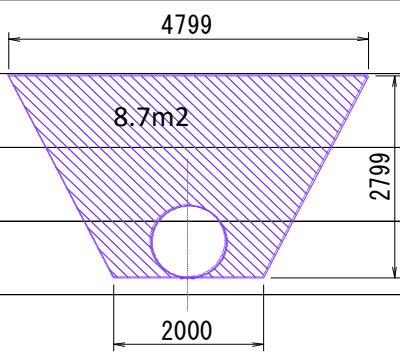


ブロック積擁壁 (控え350+裏コン200)							
数量集計表 (1 / 2)							
工 種	種 別	細 別	規 格	単 位	数量 (算出値)	数量 (設計値)	摘 要
仮設工 (構造物撤去工)	構造物取壊し工	コンクリート 構造物取壊し	無筋構造物	m3	4.6	4.6	
〃	運搬処理工	殻運搬	無筋構造物	m3	4.6	4.6	10.81t
〃	構造物切断工	コンクリート 切断工	無筋構造物	m	19.3	19.3	
仮設工 (仮水路造成)	作業土工	床掘	土砂	m3	528.9	529	
〃	運搬	仮置場へ運搬	DT4t L=0.3km	m3	420.1	420	529-98/0.9=420.1
〃	仮水路工	暗渠排水管 (据付)	φ 1,000 ダブルプレスト管	m	11.3	11.3	
〃	〃	大型土のう (製作・設置)	-3.0m以上2.0m以下	袋	5.0	5	
〃	作業土工	埋戻	1.0m以上4.0m未満	m3	98.3	98	
〃	仮設材	敷鉄板	t=22mm 1.524×6.096	m2	241.5	241.5	26枚 41.70t
法覆護岸工 (構造物撤去工)	作業土工	床掘	土砂	m3	58.6	59	
〃	〃	〃	岩塊	m3	0.4	0	
〃	構造物取壊し工	コンクリート 構造物取壊し	無筋構造物	m3	29.3	29.3	
〃	運搬処理工	殻運搬	無筋構造物	m3	29.3	29.3	68.86t
法覆護岸工	作業土工	床掘	土砂	m3	1.5	2	
〃	〃	〃	岩塊	m3	4.1	4	
〃	コンクリートブロック工	裏込材(砕石)	RC-80	m3	9.6	9.6	
〃	〃	コンクリートブロック	控え350 水抜きパイプ有	m2	49.6	49.6	
〃	〃	裏込コンクリート	18-8-40BB	m3	9.9	9.9	
〃	〃	胴込コンクリート	18-8-40BB	m3	10.9	10.9	裏込+胴込 9.9+10.9=20.8
〃	〃	現場打天端 コンクリート	18-8-40BB	m3	0.9	0.9	
〃	〃	間詰コンクリート	18-8-40BB	m3	1.3	1.3	
〃	〃	現場打小口止 コンクリート	18-8-40BB	m3	2.8	2.8	
〃	〃	摺付コンクリート	18-8-40BB	m3	1.4	1.4	
〃	〃	型枠	一般型枠、無筋構造物	m2	3.8	3.8	
〃	〃	目地板	瀝青繊維質板 10mm	m2	5.9	5.9	
〃	作業土工	埋戻し	土砂 1.0m以上、4.0m未満	m3	44.8	45	
〃	運搬	仮置場へ運搬	DT4t L=0.3km	m3	11.0	11	45/0.9-2=48.0 59-48=11.0

[illegible]


[illegible]

種 別	数 量 計 算	数 量
仮設工 (造成)		
(1)作業土工	1)床掘(土砂)	
	V= 計算書より = 421.5	
	V= 横断部 L=11.30m 下図より	
		
	9.5 × 11.3 = 107.35	
	合計 = 528.85	528.9 m³
(2)仮水路工	1)暗渠排水管(据付) φ 1,000ダブルプレスト管	
	L= 図面より = 11.3	11.3 m
	2)大型土のう(製作・設置)-3.0m以上2.0m以下	
	N= 図面より(上流側4.70m) = 4.7	5 袋
(3)作業土工	1)埋戻(埋戻幅1.0m以上4.0m未満)	
	V= 横断部 L=11.30m 下図より	
		
	8.7 × 11.3 = 98.31	98.3 m³

[illegible]

種 別	数 量 計 算	数 量
法覆護岸工		
(1)作業土工	1)床掘(土砂)	
	V= 計算書より = 1.5	1.5 m ³
	2)床掘(岩塊)	
	V= 計算書より = 4.1	4.1 m ³
(2)コンクリートブロック工	1)裏込材(RC-80)	
	V= 計算書より = 9.6	9.6 m ³
	2)コンクリートブロック(控え350mm、間知ブロック)	
	V= 計算書より = 49.6	49.6 m ²
	3)裏込コンクリート(コンクリートブロック1m2あたり0.20m3使用)	
	V= 49.6 × 0.20 = 9.9	9.9 m ³
	4)胴込コンクリート(コンクリートブロック1m2あたり0.22m3使用)	
	V= 49.6 × 0.22 = 10.9	10.9 m ³
	5)現場打天端コンクリート(18-8-40BB)	
	V= 計算書より = 0.9	0.9 m ³
	6)間詰コンクリート(18-8-40BB)	
	V= 計算書より = 1.3	1.3 m ³

[illegible]

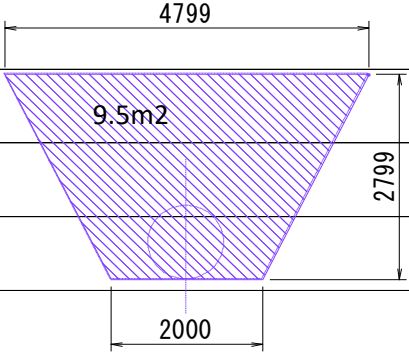種 別	数 量 計 算	数 量
仮設工 (撤去)		
(1)作業土工	1)床掘(土砂)	
	V= 横断部 L=11.30m 造成時埋戻し分掘削	= 98.31 98.3 m ³
	2)埋戻(最大埋戻幅4.0m以上)	
	V= 計算書より	= 373.0
	V= 横断部 L=11.30m 下図より	
		
	9.5 × 11.3 = 107.35	
	合計 = 480.35	480.4 m ³
	3)法面整形(盛土部)	
	A= 計算書より	= 106.4 106.4 m ²
(2)仮水路工	1)暗渠排水管(撤去) φ 1,000ダブルプレスト管	
	L= 仮設工造成時(暗渠排水管据付)と同じ	= 11.3 11.3 m
	2)大型土のう撤去	
	N= 仮設工造成時(大型土のう製作・設置)と同じ	= 5.0 5 袋

[illegible]

種 別	数 量 計 算	数 量
林道整備		
(1)作業土工	1)掘削(土砂)	
	V= 計算書より = 1.8	1.8 m ³
	2)路体盛土(2.5m未満)	
	V= 計算書より = 0.6	0.6 m ³
	3)下層路盤(敷砂利、t=0.10m)	
	A= 3.00 × 16.00 = 48.0	48.0 m ²
(2)残土計算	1)土砂	
(床掘-埋戻)	V= (528.85 + 58.60 + 1.50 + 98.31	
	+ 1.80) - (98.31 + 44.80 + 480.35 + 0.60)	
	÷ 0.9 = -4.34	-4.3 m ³
(床掘)	1)岩塊	
	V= 0.40 + 4.10 = 4.5	4.5 m ³
	V= 4.5 - 4.3 = 0.2	
	現地調整	

測 点	距 離	床掘(土砂)			埋戻(埋戻幅1m以上4m未満)			備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
SP.1	0.0	10.5						SP1
No.1	5.1	25.8	18.15	92.6				
EC.1	4.7	19.6	22.70	106.7				EC.1
No.1 + 7.0	3.3	16.9	18.25	60.2				
No.1 + 10.0	3.0	18.8	17.85	53.6				
No.1 + 13.5	3.5	17.8	18.30	64.1				
No.1 + 17.0	3.5	7.5	12.65	44.3				
合 計	23.1			421.5			0.0	

測 点	距 離	床掘(土砂)			床掘(岩塊)			備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
NO. 1 + 1.0	0.0	4.6						
NO. 1 + 3.7	2.7	4.0	4.30	11.6				EC.1
NO. 1 + 7.0	3.3	4.0	4.03	13.3				
NO. 1 + 10.0	3.0	4.6	4.29	12.9	0.1	0.06	0.2	
NO. 1 + 13.5	3.5	3.7	4.12	14.4		0.06	0.2	
NO. 1 + 17.0	3.5		1.84	6.4				
合 計	16.0			58.6			0.4	

測 点	距 離	床掘(土砂)			床掘(岩塊)			備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
NO. 1 + 1.0	0.0	0.3			0.2			
NO. 1 + 3.7	2.7	0.2	0.26	0.7	0.2	0.20	0.5	EC.1
NO. 1 + 7.0	3.3	0.2	0.18	0.6	0.3	0.26	0.9	
NO. 1 + 10.0	3.0		0.08	0.2	0.3	0.28	0.8	
NO. 1 + 13.5	3.5	0.0	0.01		0.4	0.33	1.2	
NO. 1 + 17.0	3.5		0.01			0.20	0.7	
合 計	16.0			1.5			4.1	

測 点	距 離	埋戻(1.0m以上4.0m未満)						備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
NO. 1 + 1.0	0.0	2.2						
NO. 1 + 3.7	2.7	3.0	2.63	7.1				EC.1
NO. 1 + 7.0	3.3	3.5	3.25	10.7				
NO. 1 + 10.0	3.0	3.7	3.56	10.7				
NO. 1 + 13.5	3.5	2.8	3.24	11.3				
NO. 1 + 17.0	3.5		1.42	5.0				
合 計	16.0			44.8			0.0	

測 点	距 離	裏込砕石(RC-80)			間知ブロック(控え350)			備 考
		面 積	平 均	立 積	長 さ	平 均	面 積	
NO. 1 + 1.5	0.0	0.7			3.5			
NO. 1 + 3.7	1.7	0.7	0.69	1.2	3.4	3.45	6.0	EC.1
NO. 1 + 7.0	3.3	0.7	0.67	2.2	3.3	3.35	11.1	
NO. 1 + 10.0	3.0	0.6	0.65	1.9	3.3	3.30	9.9	
NO. 1 + 13.5	3.5	0.6	0.62	2.2	3.2	3.25	11.4	
NO. 1 + 17.0	3.5	0.6	0.61	2.1	3.2	3.20	11.2	
合 計	15.0			9.6			49.6	

測 点	距 離	現場打天端コンクリート(18-8-40BB)			間詰コンクリート(18-8-40BB)			備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
NO. 1 + 1.5	0.0	0.1			0.0			
NO. 1 + 3.7	1.7	0.1	0.06	0.1	0.0	0.03		EC.1
NO. 1 + 7.0	3.3	0.1	0.06	0.2	0.1	0.04	0.1	
NO. 1 + 10.0	3.0	0.1	0.06	0.2	0.2	0.13	0.4	
NO. 1 + 13.5	3.5	0.1	0.06	0.2	0.1	0.15	0.5	
NO. 1 + 17.0	3.5	0.1	0.06	0.2	0.1	0.09	0.3	
合 計	15.0			0.9			1.3	

測 点	距 離	摺付コンクリート(18-8-40BB)			摺付コンクリート(型枠)			備 考
		面 積	平 均	立 積	長 さ	平 均	面 積	
NO. 1 + 1.5	0.0	1.6			2.2			
NO. 1 + 3.7	1.7		0.81	1.4	2.3	2.21	3.8	EC.1
NO. 1 + 7.0	3.3							
NO. 1 + 10.0	3.0							
NO. 1 + 13.5	3.5							
NO. 1 + 17.0	3.5							
合 計	15.0			1.4			3.8	

測 点	距 離	埋戻(最大埋戻幅4.0m以上)			法面整形(盛土部)			備 考
		面 積	平 均	立 積	長さ	平 均	面積	
SP.1		10.5						SP1
No.1	5.1	21.9	16.20	82.6	5.0	2.50	12.8	
EC.1	4.7	17.2	19.55	91.9	6.2	5.60	26.3	EC.1
No.1 + 7.0	3.3	15.0	16.10	53.1	6.3	6.25	20.6	
No.1 + 10.0	3.0	16.1	15.55	46.7	6.3	6.30	18.9	
No.1 + 13.5	3.5	16.3	16.20	56.7	4.8	5.55	19.4	
No.1 + 17.0	3.5	7.7	12.00	42.0		2.40	8.4	
合 計	23.1			373.0			106.4	

測 点	距 離	掘削(土砂)			路体盛土(2.5m未満)			備 考
		面 積	平 均	立 積	面 積	平 均	立 積	
NO. 1 + 1.0	0.0	0.3						
NO. 1 + 3.7	2.7	0.1	0.19	0.5	0.0	0.01		EC.1
NO. 1 + 7.0	3.3	0.1	0.11	0.4	0.1	0.05	0.1	
NO. 1 + 10.0	3.0	0.1	0.10	0.3	0.1	0.08	0.2	
NO. 1 + 13.5	3.5	0.1	0.11	0.4	0.0	0.06	0.2	
NO. 1 + 17.0	3.5		0.07	0.2		0.02	0.1	
合 計	16.0			1.8			0.6	